


## Our Fluids Outlast All Others

... even ones costing many times more!

Our exclusive additive system delivers unparalleled protection and service life. This report shows **Duratherm's** superior resistance to oxidation, the main cause of sludge buildup and fluid degradation.

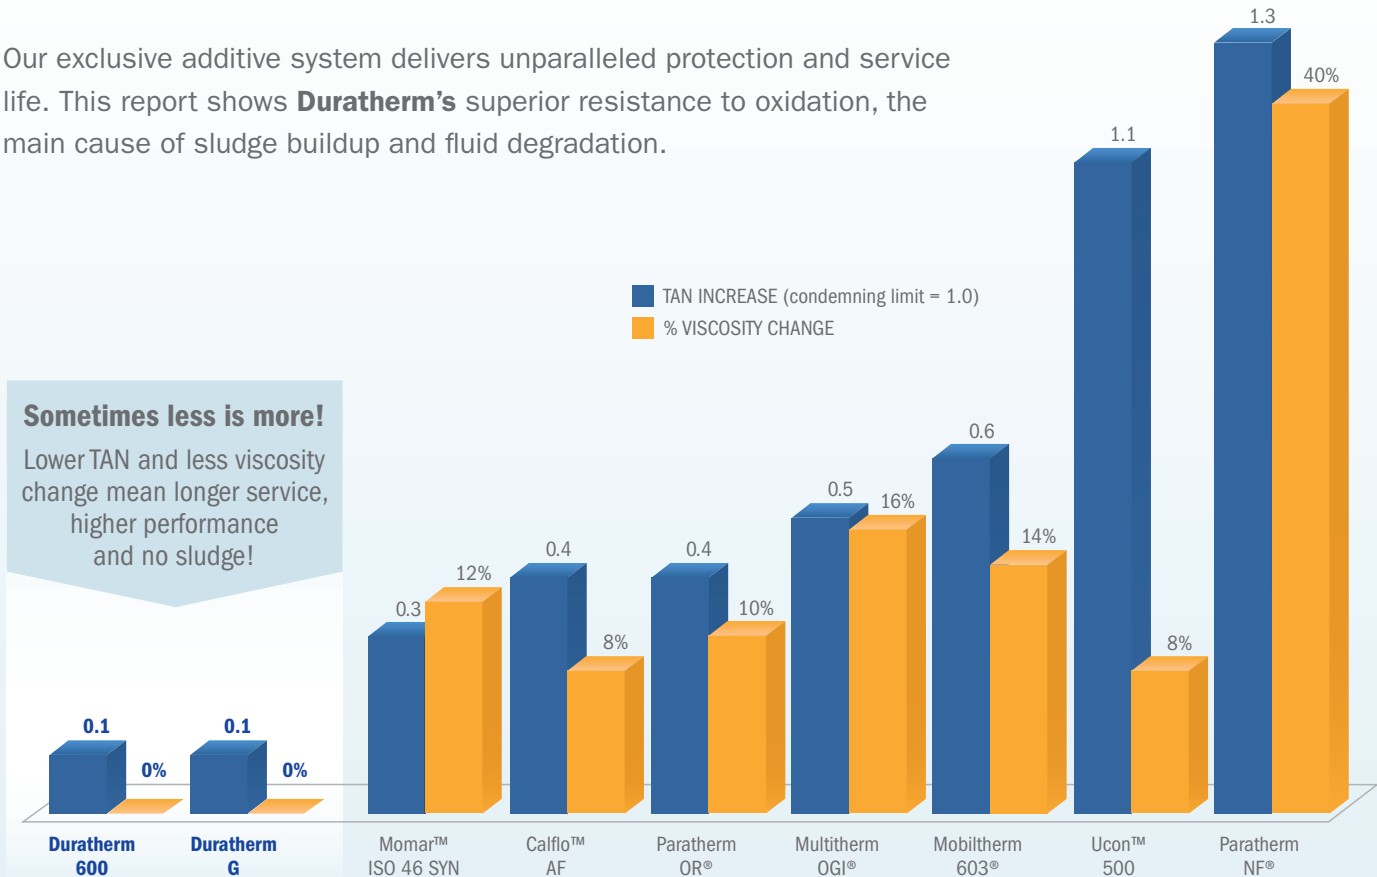

### ABOUT THE TEST

We chose 6 competing products\*, ranging from low budget hot oils to some of the more expensive premium fluids from Exxon Mobil Corporation®, Dow Chemical Company®, Paratherm Corporation®, Petro-Canada Inc®, Momar® and Multitherm LLC®.

### ABOUT THE METHOD

IP48 is an International Petroleum test standard in which 40ml of fluid is exposed to 400°F with 15L/h of air blown through the samples for 24 hours. This accelerates the aging process and shows a fluid's resistance to oxidation.

\* FLUIDS TESTED : Calflo AF® - lot #044945 | Duratherm G - lot #058448 | Duratherm 600 - lot #058689 | Mobiltherm 603® - lot #M19K9A3  
Multitherm OGI® - lot #03/3318/115999 | Paratherm OR® - lot # CN4060031-L12 | Paratherm NF® - lot #CN4000042-B02 | Ucon 500® - lot # 335073 #058689